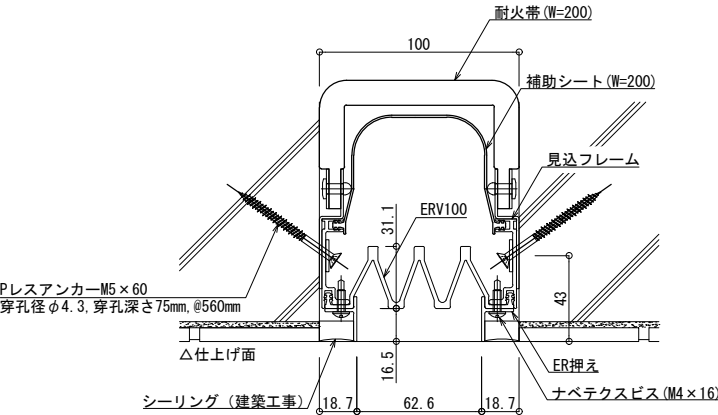


■	外壁 - 外壁	SL-L100RG（耐火仕様）12.5mm	種別：樹脂ゴム 色：	アンカー固定間隔： @ ≤ 560 mm		S= 1:2								
 <table><tr><th>可動図</th><th>可動量</th></tr><tr><td></td><td>+50mm -50mm</td></tr><tr><td></td><td>+50mm -50mm</td></tr><tr><td></td><td>+50mm -50mm</td></tr></table> ！ご使用にあたっての注意点！ 本Rシリーズは樹脂製品のため、 躯体精度によりたわみ・ねじれ等の癖が付きますが、 可動性能には影響はございません。							可動図	可動量		+50mm -50mm		+50mm -50mm		+50mm -50mm
可動図	可動量													
	+50mm -50mm													
	+50mm -50mm													
	+50mm -50mm													

制定: 2024. 09. 20
改定: 2024. 09. 20
改定: 2024. 09. 30