


■	天井コーナー	SL-L200RTCB（野縁受け平行 ボード1枚貼り）（天井マルチ下地仕様）	種別：樹脂ゴム	アンカー固定間隔： @ ≤ 560 mm	S= 1:2
			色：		

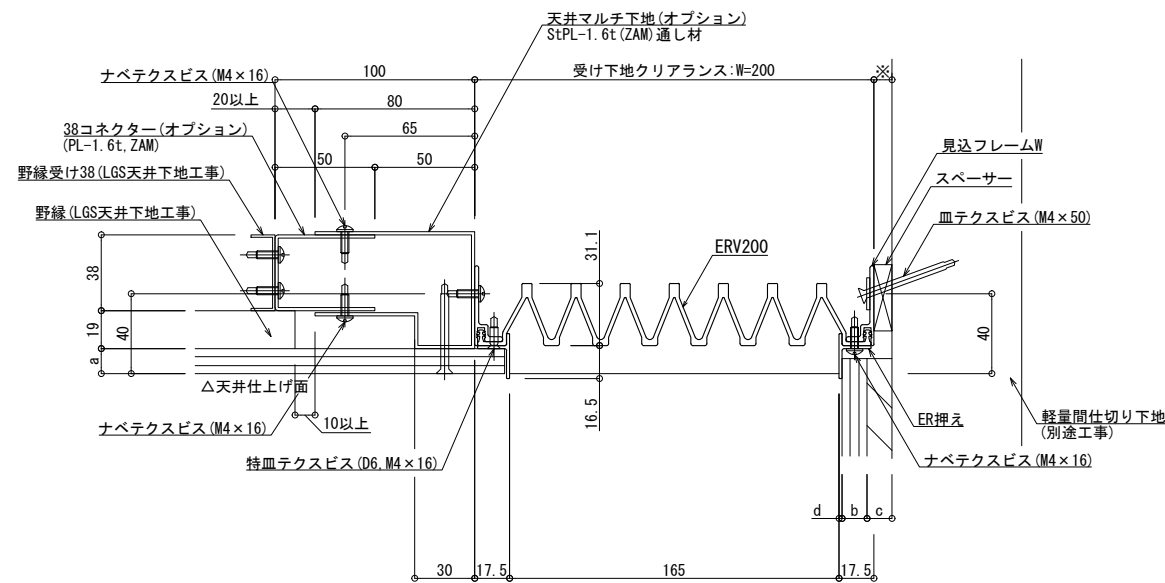

可動図	可動量
	+100mm -100mm
	+100mm -100mm
	+100mm -100mm

！ご使用にあたっての注意点！

本Rシリーズは樹脂製品のため、
躯体精度によりたわみ・ねじれ等の癖が付きますが、
可動性能には影響はございません。

ボード厚による

a
12.5
9.5

b	c	d	※
12.5	12.5	1.5	9
12.5	9.5	1.5	6
9.5	12.5	1.5	6
9.5	9.5	1.5	3
12.5	0	5	0

※スペースー

制定: 2024.09.20 變更: 2024.09.30

■	天井コーナー	SL-L200RTCB（野縁受け直行 ボード2枚貼り）（天井マルチ下地仕様）	種別：樹脂ゴム 色：	アンカー固定間隔： @ ≤ 560 mm	S= 1:2																																				
			<table><tr><th>可動図</th><th>可動量</th></tr><tr><td></td><td>+100mm -100mm</td></tr><tr><td></td><td>+100mm -100mm</td></tr><tr><td></td><td>+100mm -100mm</td></tr></table>			可動図	可動量		+100mm -100mm		+100mm -100mm		+100mm -100mm																												
			可動図	可動量																																					
				+100mm -100mm																																					
				+100mm -100mm																																					
	+100mm -100mm																																								
！ご使用にあたっての注意点！ 本Rシリーズは樹脂製品のため、 躯体精度によりたわみ・ねじれ等の癖が付きますが、 可動性能には影響はございません。			<table><tr><td colspan="2">ボード厚による</td><td>c</td><td>d</td><td>e</td><td>※</td></tr><tr><td>a</td><td>b</td><td>12.5</td><td>12.5</td><td>1.5</td><td>9</td></tr><tr><td>12.5</td><td>12.5</td><td>12.5</td><td>9.5</td><td>1.5</td><td>6</td></tr><tr><td>12.5</td><td>9.5</td><td>9.5</td><td>12.5</td><td>1.5</td><td>6</td></tr><tr><td>9.5</td><td>12.5</td><td>9.5</td><td>9.5</td><td>1.5</td><td>3</td></tr><tr><td>9.5</td><td>9.5</td><td>12.5</td><td>0</td><td>5</td><td>0</td></tr></table> ※スパーサー厚			ボード厚による		c	d	e	※	a	b	12.5	12.5	1.5	9	12.5	12.5	12.5	9.5	1.5	6	12.5	9.5	9.5	12.5	1.5	6	9.5	12.5	9.5	9.5	1.5	3	9.5	9.5	12.5	0	5	0
						ボード厚による		c	d	e	※																														
a	b	12.5	12.5	1.5	9																																				
12.5	12.5	12.5	9.5	1.5	6																																				
12.5	9.5	9.5	12.5	1.5	6																																				
9.5	12.5	9.5	9.5	1.5	3																																				
9.5	9.5	12.5	0	5	0																																				