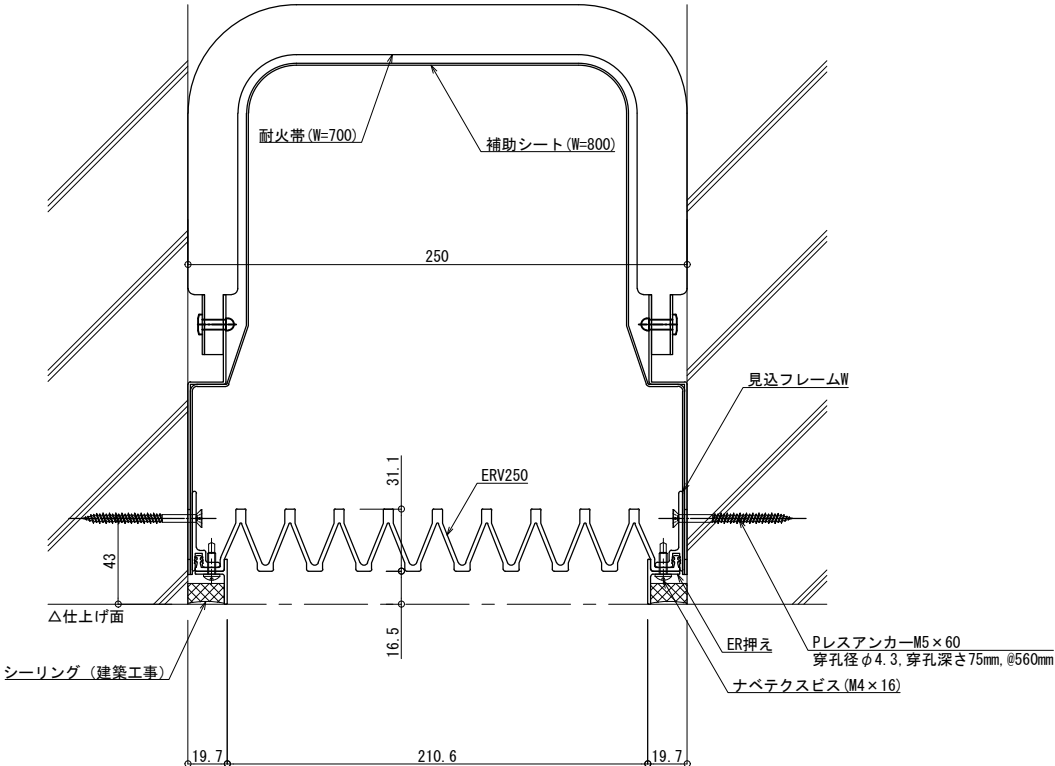











制定: 2024. 04. 18
改定: 2024. 04. 18
改定: 2024. 11. 23

■	外壁コーナー	SL-L250RGC（耐火仕様）25mm	種別：樹脂ゴム	アンカー固定間隔：	S= 1:2								
			色：	@ ≤ 560 mm									
													
<table><tr><th>可動図</th><th>可動量</th></tr><tr><td></td><td>+125mm -125mm</td></tr><tr><td></td><td>+125mm -125mm</td></tr><tr><td></td><td>+125mm -125mm</td></tr></table> ！ご使用にあたっての注意点！ 本Rシリーズは樹脂製品のため、 躯体精度によりたわみ・ねじれ等の癖が付きますが、 可動性能には影響はございません。						可動図	可動量		+125mm -125mm		+125mm -125mm		+125mm -125mm
可動図	可動量												
	+125mm -125mm												
	+125mm -125mm												
	+125mm -125mm												