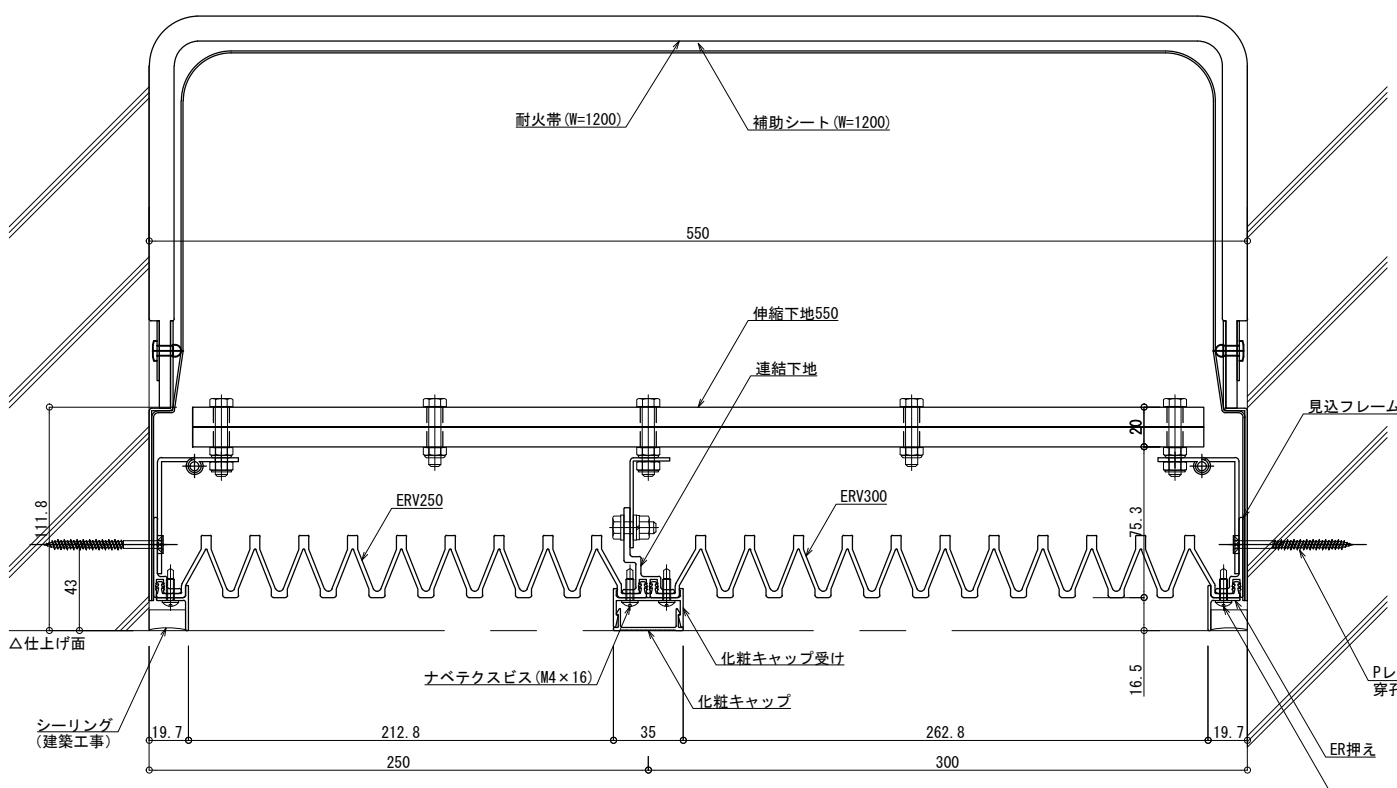











版更:
制定: 2024. 09. 20

■	外壁コーナー	SL-L550RGC（耐火仕様）12. 5mm	種別： 樹脂ゴム	アンカー固定間隔： @ ≤ 560 mm		S= 1:2									
			色：												
							<table><tr><th>可動図</th><th>可動量</th></tr><tr><td></td><td>+275mm -275mm</td></tr><tr><td></td><td>+275mm -275mm</td></tr><tr><td></td><td>+275mm -275mm</td></tr></table>	可動図	可動量		+275mm -275mm		+275mm -275mm		+275mm -275mm
可動図	可動量														
	+275mm -275mm														
	+275mm -275mm														
	+275mm -275mm														
！ご使用にあたっての注意点！ 本Rシリーズは樹脂製品のため、 躯体精度によりたわみ・ねじれ等の癖が付きますが、 可動性能には影響はございません。															