



7) 躯体凹部取付金具 (支持間隔3,000mm以内)

躯体凹部取付金具納まり

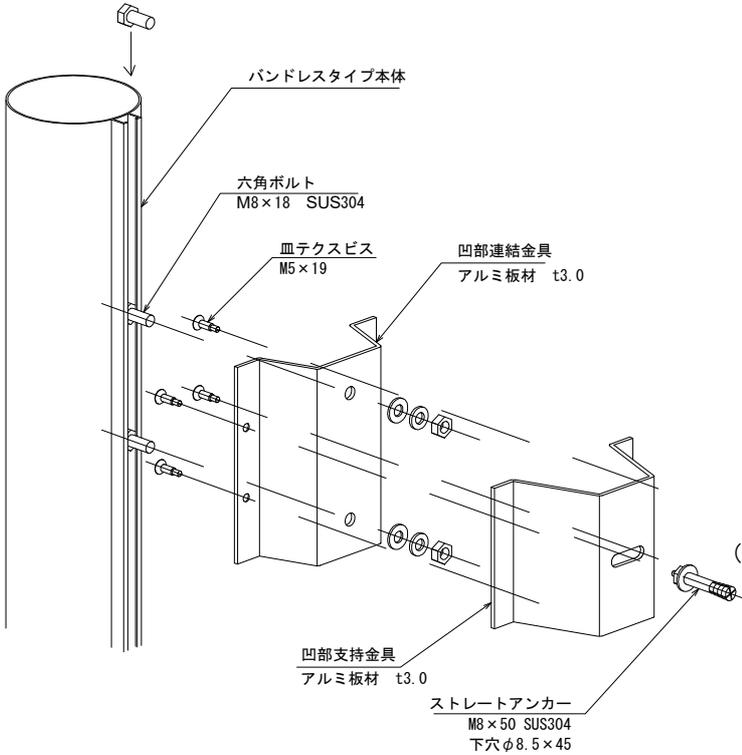


(平断面図)

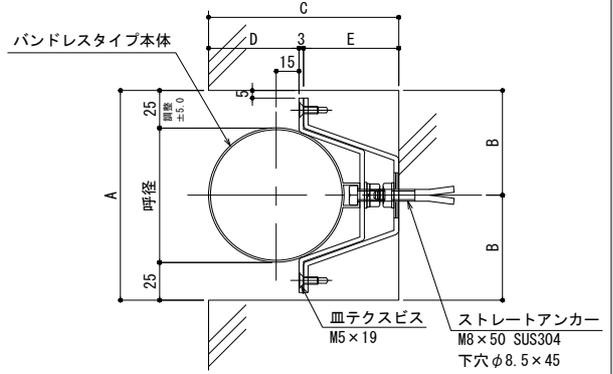


呼径	A	B	C	D	E
60φ	110.5	55.3	95.5	45.3	47.3
89φ	139	69.5	124	59.5	61.5
114φ	164	82	149	72	74
140φ	190	95	175	85	87
165φ	220	110	200	102	95

(側断面図)

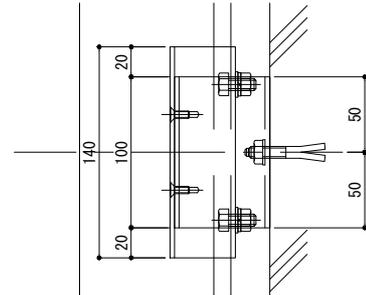

(立面図 (正面図))

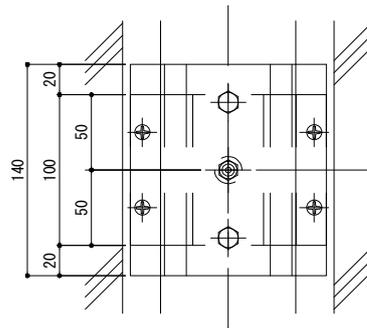

※出幅調整が必要な場合は、アルミライナー(別途)をご使用ください。